
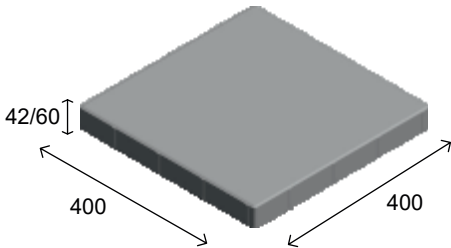


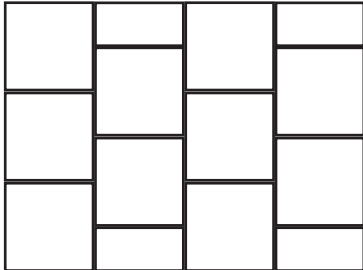

DALA

Aspect suprafata	Beton vibropresat, cu strat de uzura colorat in masa
Produs	
Dimensiune (mm) L x l	400 x 400
Grosime (mm)	42, 60
Caracteristici tehnice	- greutate: 42 mm - 95 kg / mp, 60 mm - 130 kg/mp - consum specific: 6,25 buc / mp - ambalare: 42 mm - 14,40 mp / palet; 60 mm - 9,6 mp/palet
Culori disponibile	Mix Rosu, Mix Alb-Negru, Scoica Maro, Scoica Negru, Gri, Rosu
Domenii utilizare	Rezidential, Pietonal
Standarde conformitate	SR EN 1338:2004 / AC:2006
Caracteristici esentiale	- rezistenta la intindere prin despicare $T > 3.6$ MPa - rezistenta la actiunea factorilor climatici: - clasa 2, marcare B pentru absorbtia apei ≤ 6; - clasa 3, marcare D pentru rezistenta la inghet-dezghet ≤ 1; - rezistenta la uzura(abraziune); - clasa 4, marcare I $\leq 18.000 \text{ mm}^2 / 5.000 \text{ mm}^2$
Desen tehnic	
Model montaj	

NOTA

Posibilele diferente cromatice intre produsele reale si imagini pot aparea datorita conditiilor de fotografiere si nu fac obiectul reclamatilor.